■ DB-209/DB-409 OVERALL WIRING DIAGRAM

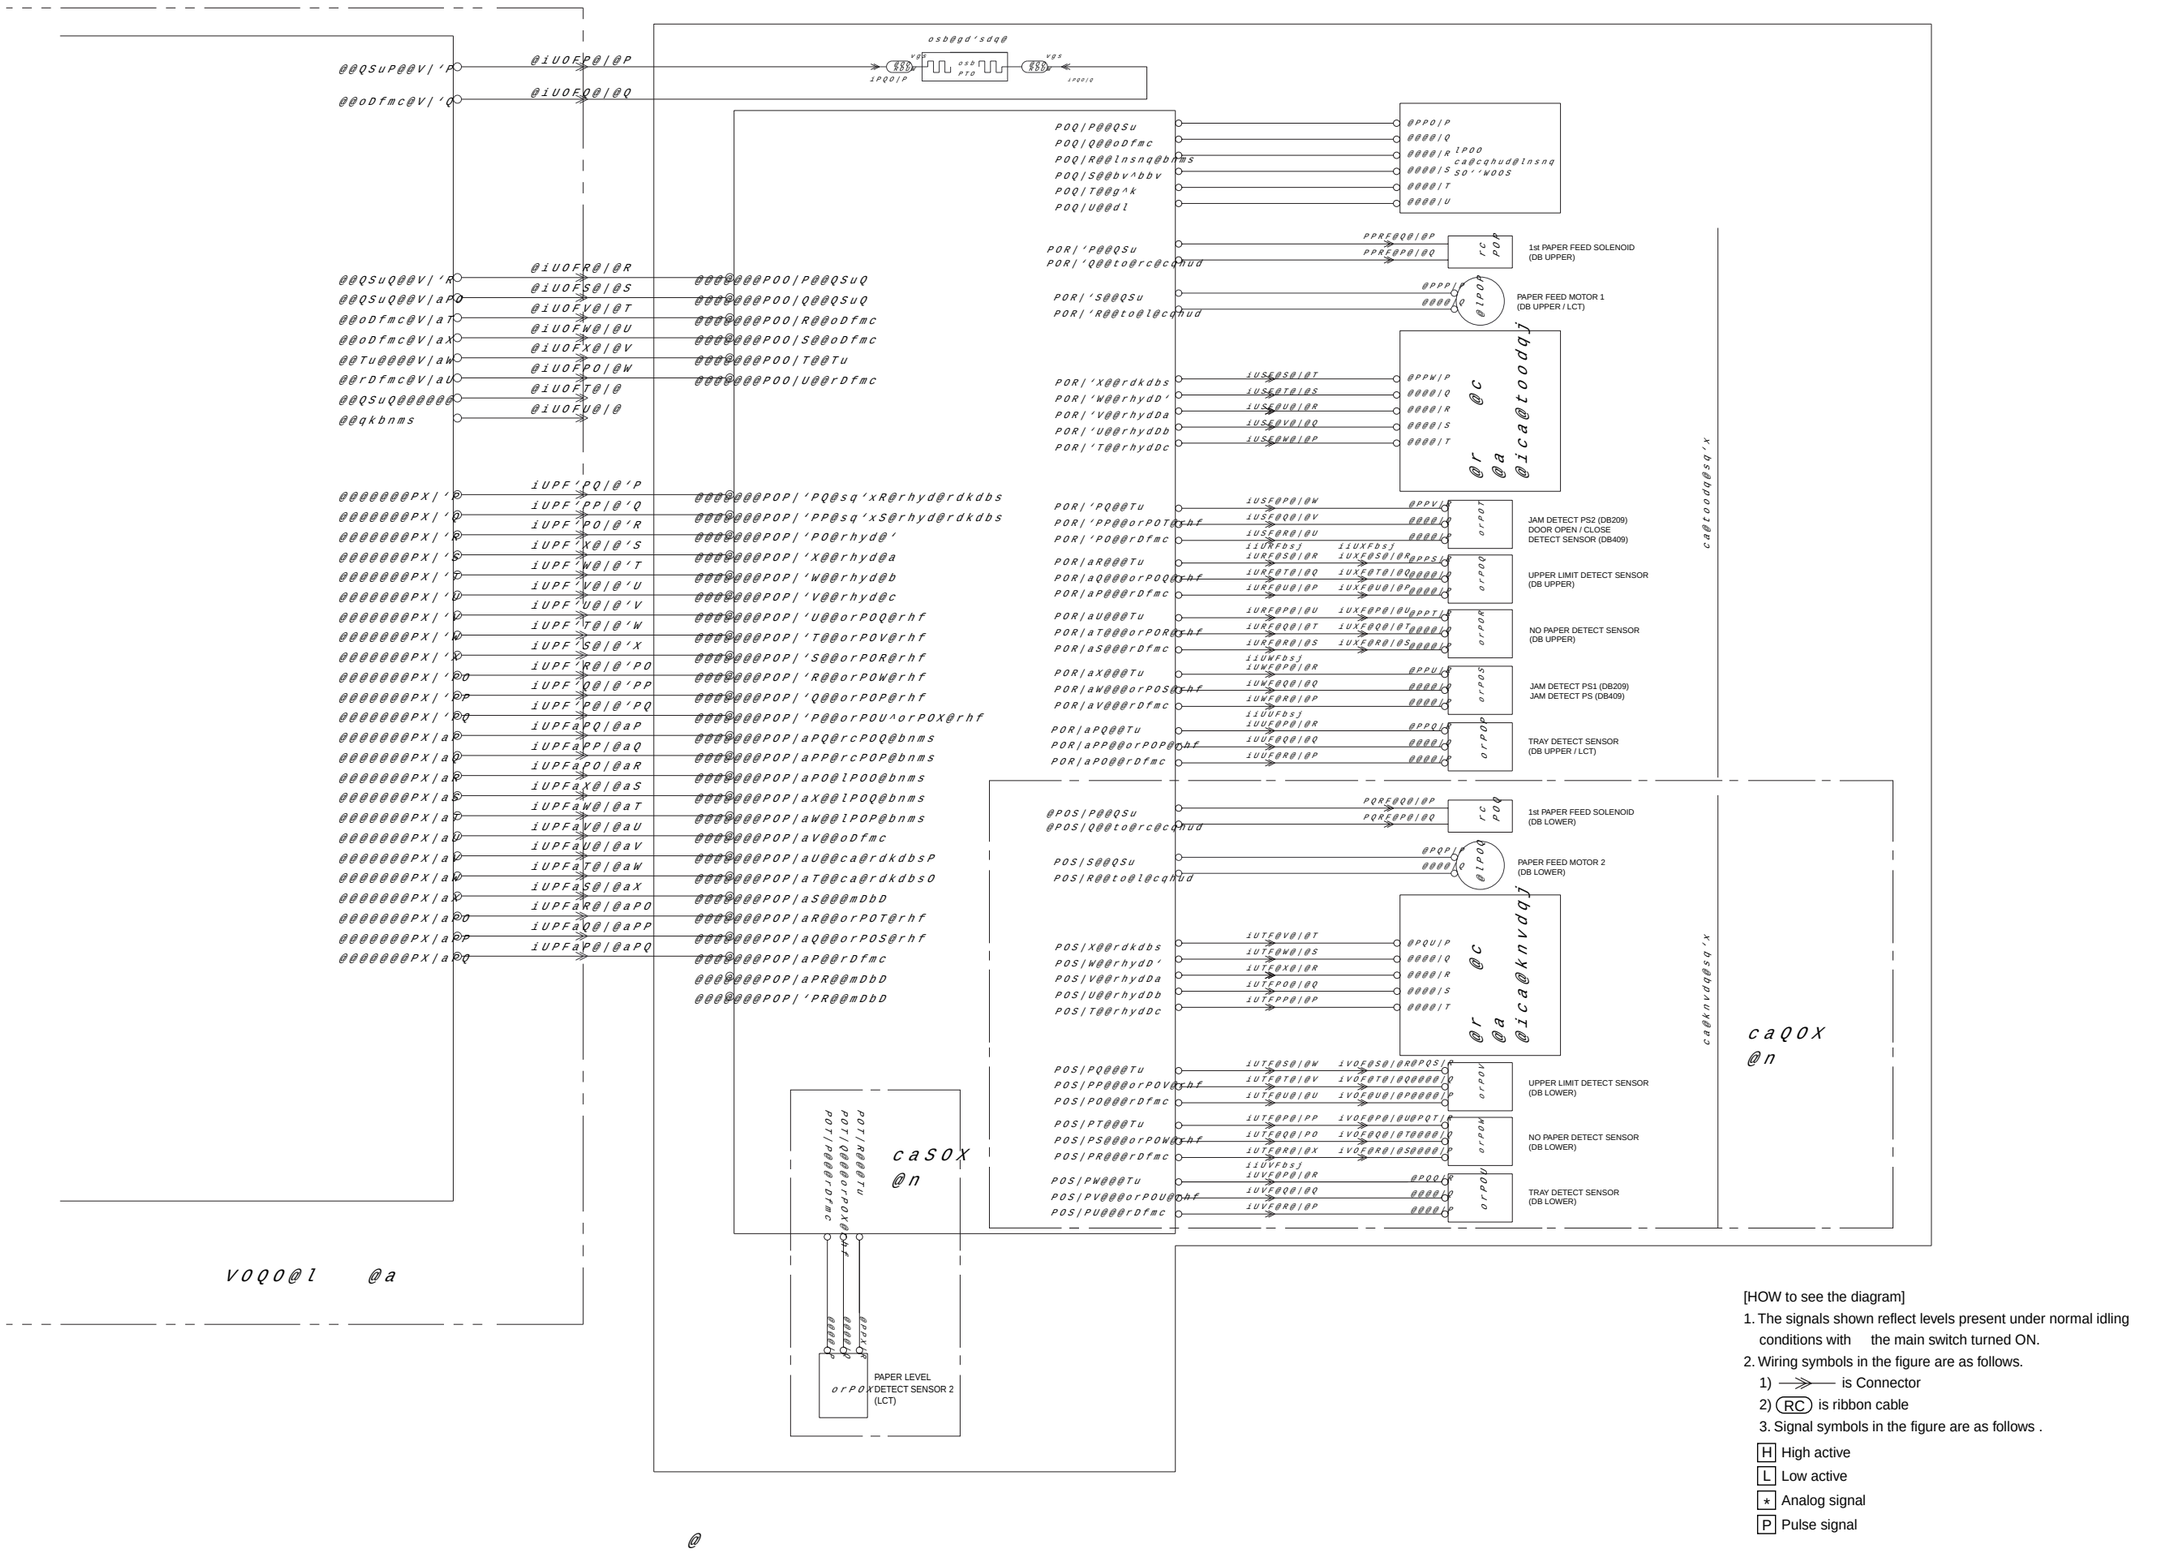

[HOW to see the diagram]

1. The signals shown reflect levels present under normal idling conditions with the main switch turned ON.
2. Wiring symbols in the figure are as follows.
   1) ⟶⟩⟵ is Connector
   2) (RC) is ribbon cable
   3. Signal symbols in the figure are as follows .

   [H] High active
   [L] Low active
   [*] Analog signal
   [P] Pulse signal