
3-5. OTHER ADJUSTMENTS

(1) Adjustment of the Scanner/Mirrors Carriage Position


Adjustment Procedure

- With the Scanner correctly positioned, there should be no clearance between the Scanner/Mirrors Carriage and the Positioning Jig.
- Before installing the jigs, temporarily secure the set screws of the cable holding plate of the Scanner. (The cable holding plate should be installed so that its marked side faces up.)

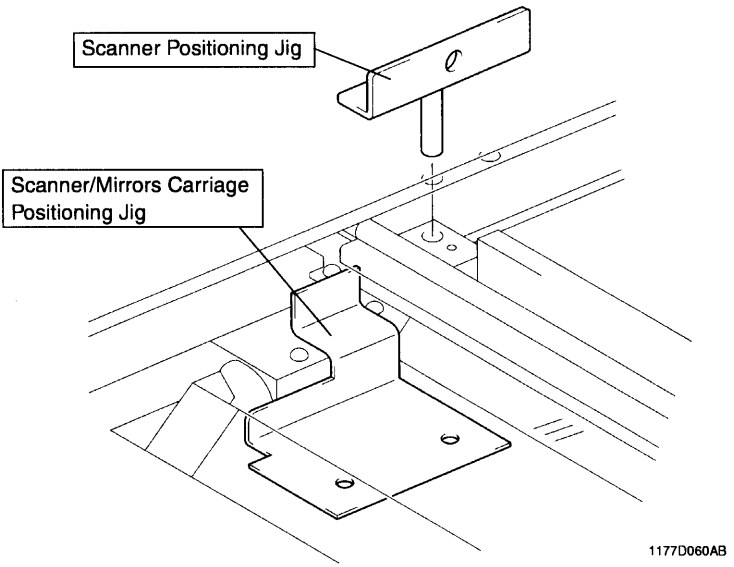


Jig Installation Positions

Scanner Positioning Jig installed in the Scanner

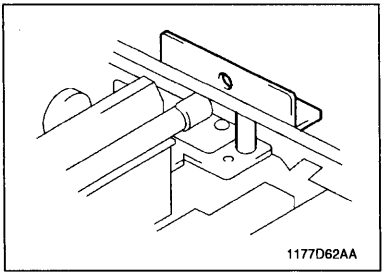

Mirrors Carriage Positioning Jig installed in the 2nd/3rd Mirrors Carriage

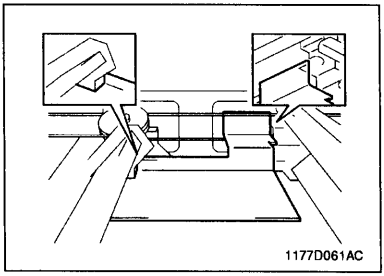

NOTE
Fit the Scanner Positioning Jig in the hole on the paper exit end.