



6. Wind the shorter length of Cable around Pulley A.





7. Secure the shorter length of Cable to the Cable Fixing Bracket, ensuring a distance of 2 mm or less for the dimension shown on the left. Then, secure the Bracket.



8. Wind the longer length of Cable around the Pulley B.
9. Hook the spring onto the longer length of Cable and then pull the spring to hook it onto the shorter length of Cable.
10. Remove the wrench and peel off the two pieces of tape used in steps 2 and 3.

(10) Winding of the Scanner Drive Cable

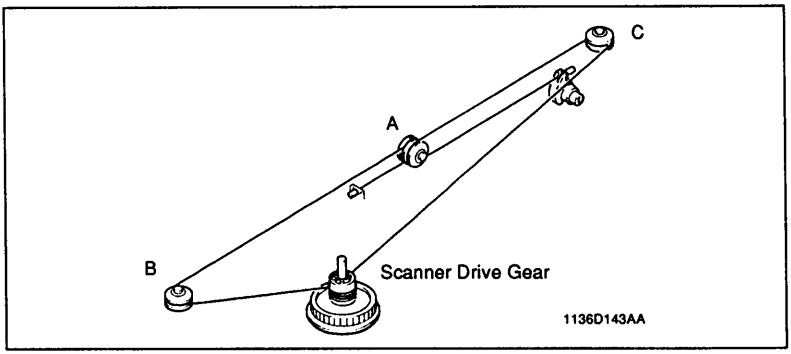

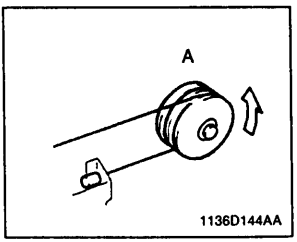

1. Slide the Scanner toward the left side of the copier as far as it will go.
2. Fit one end of the Drive Cable into the fixed anchor.
3. Wind the Scanner Drive Cable around (see figure left) Pulley A.