
## (2) ATDC Adjustment


◆ **Important**

Make this adjustment only after the starter has been replaced.





1. Load the IU with fresh starter.
2. Reinstall the IU in the copier.

3. Call the Tech. Rep. mode menu to the screen.
4. Touch [Function] to show the Function menu on the screen.
5. Touch [F8 ATDC Adjust] .
6. Press the Start Key to let the copier make the ATDC adjustment. (It will run for about 3 minutes.)

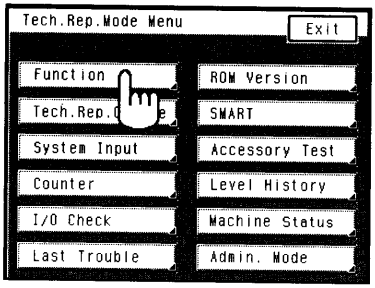


1156D142CA

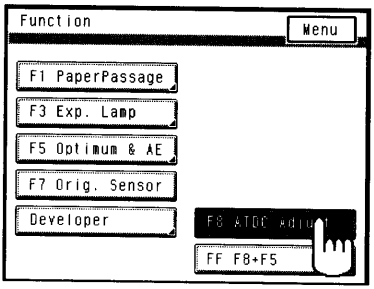


1156D139CA

***NOTES***

- *While the copier is in the adjustment cycle, the Start Key is lit up orange. The key turns green as soon as the adjustment cycle is completed.*
- *Pressing the Start Key will automatically start the ATDC adjustment cycle. Be sure to run this cycle only after the starter has been replaced.*