
2-2. Power Supply Board (PWB-C)

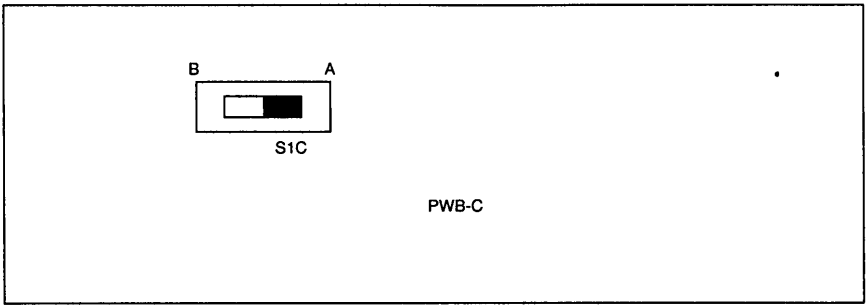


1136S004AA

- S1C: When the DT-103 is fitted to the copier, this switch is used to maintain communication (DC 5V applied) when the Power Switch is turned OFF.

S1C	Description
Position A	DC 5V is shut off when the Power is turned OFF.
Position B	DC 5V is applied if the Power Switch is turned OFF.

2-3. Original Size Detecting Board (UN2)

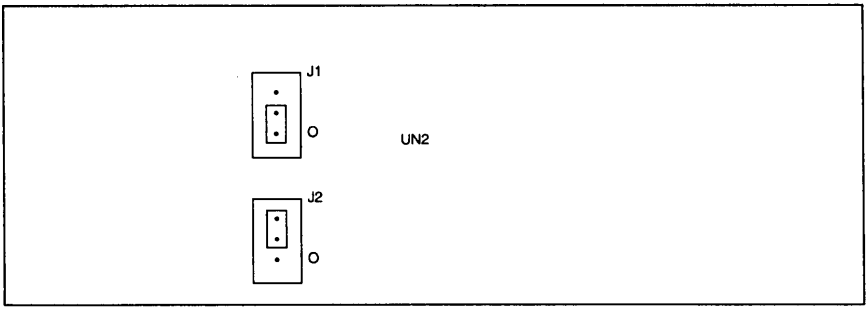

1136S005AA

J1: When the optional Original Size Detecting Sensor FD1 has been installed, change the position of the jumper connector.

J2: When the optional Original Size Detecting Sensors CD2, FD3 have been installed, change the position of the jumper connector.

Note: When the optional Original Size Detecting Sensor(s) has (have) been installed and the positions of the jumper connectors changed, the Function Mode "F7" must be executed.

	Original Size Detecting Sensor			
	FD1		CD2 FD3	
	Yes	No	Yes	No
Position of jumper connector	 J1 O 1136S006AA	 J1 O 1136S007AA	 J2 O 1136S006AA	 J2 O 1136S007AA