11-1. Drawer In Position Detection

When the 1st drawer is slid into the copier, it actuates the switch, informing the copier that the drawer has been slid into position.

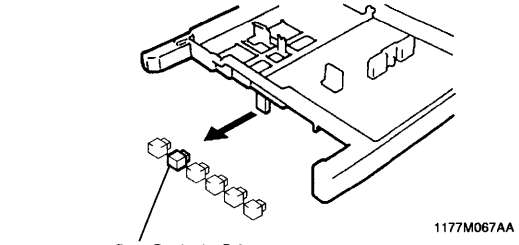

	CONTROL SIGNAL	ON	OFF	WIRING DIAGRAM
S65	PWB-A PJ15A-11	L	H	11-D

When the 2nd drawer is slid into the copier, the light blocking plate blocks the Set Sensor. The copier then knows that the drawer has been slid into position.

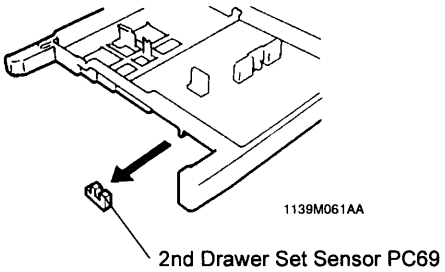

	CONTROL SIGNAL	Blocked	Unblocked	WIRING DIAGRAM
PC69	PWB-A PJ2A-2	L	H	11-E