Checking a Control Part wiht a load by Changing the Output Port Data

Example

1st Drawer Paper Take-Up Solenoid SL2 is probably faulty when a misfeed occurs at the Paper Take-Up Section of the copier.

- Procedure

1) From the circuit diagram accompanying the text, we know that the port on PWB-A for SL2 is the 8th one of P7 of the "Port" screens.

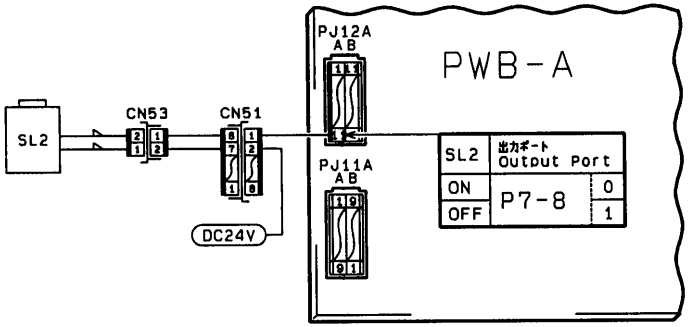

1136C01TAA

2) Select "Port" of "I/O Check" (see SWITCHES ON PWBs.) and show the following screen.



1136T034AA

3) Move the cursor to P7 and move the underline to the 8th port. Check that the data for the 8th port of P7 is "1."



1136T035AA