

2-10. C0E20: Image Erase Lamp LA2's Failure to Turn ON

Symbol	Name
LA2	Image Erase Lamp
PWB-A	Master Board

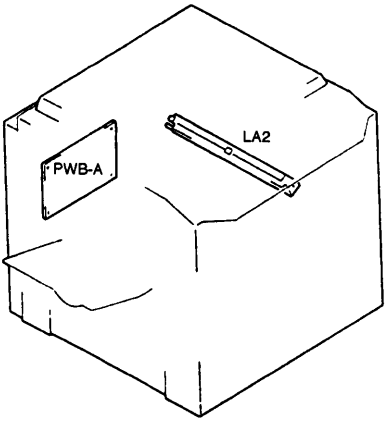

1136T021AA

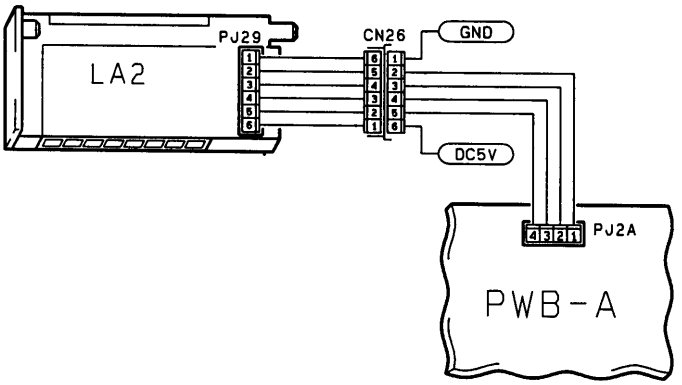

1136C17TAA

Step	Check Item	Result	Action
1	Is PJ2A plugged securely into PWB-A?	NO	Plug it in securely.
2	Is CN26 connected securely.	NO	Connect it securely.
3	Is the voltage across CN26-6 and GND DC5V?	YES	Replace LA2.
		NO	Check the 5V line.