
18-1. Drawer-in-Position Detection

- When the drawer is slid into the copier, Drawer Set Detecting Lever A is pushed in the direction of the arrow, which blocks the Drawer Set Sensor (PC61/PC62, goes LOW).

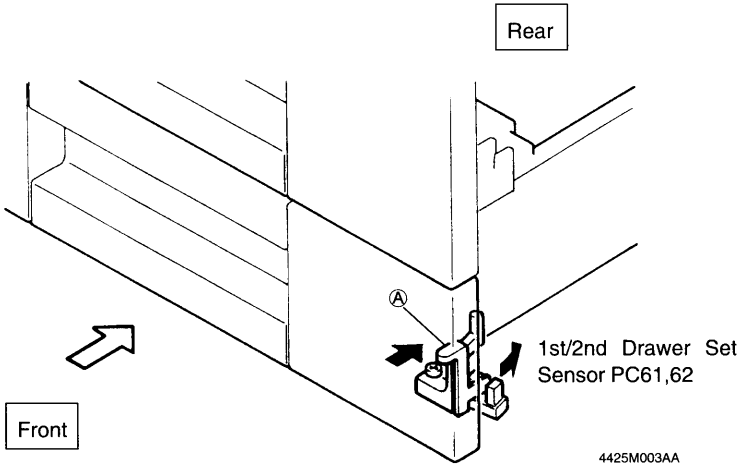

	Control Signal	Blocked	Unblocked	WIRING DIAGRAM
PC61	PWB-A PJ22A-2	L	H	25-P
PC62	PWB-A PJ22A-6	L	H	25-P