
(14) C0F02: Original Size Detecting Board Malfunction
C0FE2 to C0FFE: Original Size Detecting Sensor Failure

Relevant Electrical Parts	
Original Size Detecting Sensor FD2 PC113	Original Size Detecting Sensor CD2 PC116
Original Size Detecting Sensor CD1 PC114	Original Size Detecting Board UN2
Original Size Detecting Sensor FD3 PC115	Master Board PWB-A

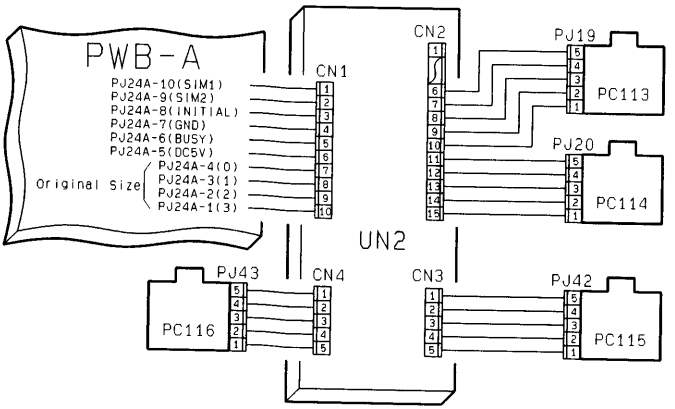

1177C18TAB

C0F02

Step	Check	Result	Action
1	J1 and J2 jumper connections on the Original Size Detecting Board are correct.	NO	Change jumper connector positions.
2	CN1 on the Original Size Detecting Board and PJ24A on the Master Board are connected.	NO	Connect.
3	The voltage across PJ24A-6 on the Master Board and GND varies in the range between DC0V and DC5V after the Power Switch has been turned ON.	YES	Change Master Board.
		NO	Change Original Size Detecting Board.

C0FE2 to C0FFE

Step	Check	Result	Action
1	J1 and J2 jumper connections on the Original Size Detecting Board are correct.	NO	Change jumper connector positions.
2	Mounting position of the Original Size Detecting Sensor that corresponds to the malfunction code is correct.	YES	Change the Original Size Detecting Sensor, Original Size Detecting Board, and Master Board.
		NO	Correct mounting position.