Choice Modes and Settings

The screen displayed in each mode is shown below. Note that the cursor on the screen indicates the initial setting.

- SCH-00



1136S159CA

- SCH-01

(Inch Area)

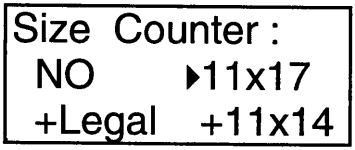

1136S160EA

(Metric Area)

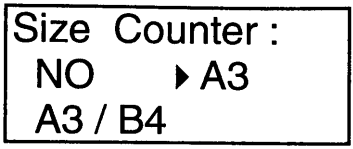

1136S122DA

- SCH-02



1136S161CA

Screen Display	Description
Mode 1	1 count per 1 copy cycle
Mode 2	Multiple count-up according to paper size and copy mode
Mode 3	Multiple count-up according to paper size and copy mode

* Counting methods of the total and size counters are according to the combination of the above count modes.

Copy Mode		1-Sided						2-Sided						Manual Feeding
SCH-01		Sizes other than those set in SCH-01			Sizes set in SCH-01			Sizes other than those set in SCH-01			Sizes set in SCH-01			
SCH-02		Mode 1	Mode 2	Mode 3	Mode 1	Mode 2	Mode 3	Mode 1	Mode 2	Mode 3	Mode 1	Mode 2	Mode 3	
Total (Electronic/Mechanical)		1			1	2	2	2			2	4	4	1
Size (Electronic)		0			1	1	2	0			2	2	0	0
Two-Sided Total (Electronic)		0			0			1	1	2	1	1	4	0
Two-Sided Size (Electronic)		0			0			0			1	1	4	0
SCH-00 Plug-In (Mechanical)	# of sheets	1			1	2	2	1	2	2	1	4	4	1
	# of copy cycles	1			1	2	2	2			2	4	4	1

0: No count 1: 1 count 2: 2 counts 4: 4 counts