

Custom 2 in 1



1136S121CA


Custom Book Mode

Inch Area

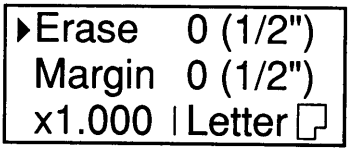

1136S133EA


Metric Area

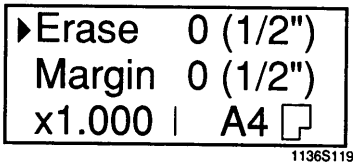

1136S119DA


Custom 2 in 1 Separation

Inch Area




1136S134EA

Metric Area



1136S120DA


Administrator Mode

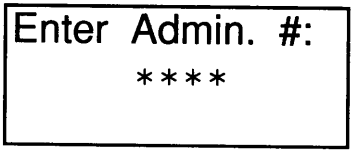

1136S135CA

Setting procedure

1) Using the Multi-Copy Keys, enter the Administrator Number (identification number.) registered in the Security Mode of the Tech. Rep. Mode.
2) The following screen appears on the Message Display:

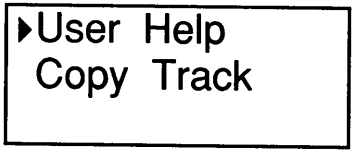


1136S118CA

3) Use the Cursor Key to select either item and press the OK Key to change the screen as shown below:

When "User Help" has been selected

"User Help" indicates that when the copier is fitted with the DT-103, a code (3 digits) for a request to replenish toner, paper, etc. can be sent to the center. Note that when no code has been entered, only the state of the machine is sent.

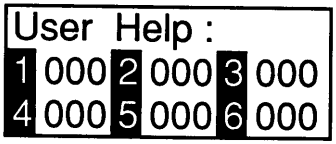

1136S137CA

Procedure

1) Using the Cursor Key, select the desired number. (The number selected flashes.)
2) Press the Clear Key to clear the current code and use the Multi-Copy Keys to enter a 3-digit code.