When "Register Access #" has been selected

"Register Access #" allows the access number (identification number) to be registered or changed on an account basis.



1136S141CA

Procedure

1) Using the OK Key, select the desired account number (1 to 26).
2) Using the Multi-Copy Keys, input the "Access #" (4 digits: 0001~9999).
3) Press the OK Key to enter the account access number and switch the screen to the next account.

When "Account Counter" has been selected

"Account Counter" allows the count of the Size/Total Counter to be displayed and cleared on an account basis.

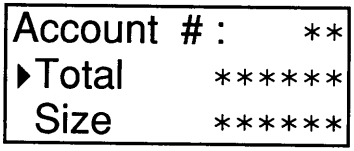

1136S142CA

Procedure

1) Using the OK Key, select the account number (1 to 26).
2) Using the Cursor Key, select the desired Counter.
3) Press the Clear Key to clear the count.