
2. Warning Screen

- The warning screen may be a malfunction display, error display, warning display, or a caution display.

<Malfunction Display>

- A malfunction display is given when trouble occurs which cannot be corrected by the user.

Example: Malfunction that can be identified with a specific code.

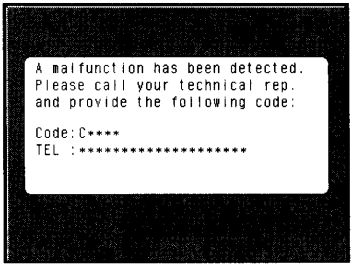


1149O421CA

<Error Display>

- An error display is given when trouble occurs which can be corrected by the user.

Examples: Paper misfeed, toner empty, door open.

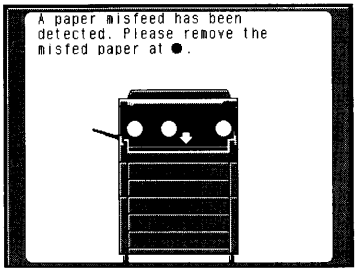


1149O387CA

<Warning Display>

- A warning display is given when any further copier operation will not be possible, or only faulty results will come out, due to erroneous panel settings or other cause.

Example:
Unmatched paper size in Auto Paper

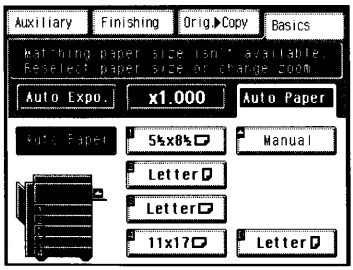


1149O422CA

<Caution Display>

- A caution display is given when, though further copier operation will be possible, it could result in a malfunction.

Example:
Toner empty



1149O385CA