
1149SBS0600A

6 FACTORY SETTING

- Factory Setting is used to make adjustments at the factory.

1149SBS0601A

6-1. Factory Setting Menu Screen

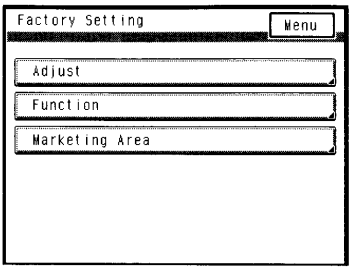

1149O424CA

1149SBS0602A

6-2. Factory Setting Function Setting Procedure

<Setting Procedure>

1. Set the copier into the Tech. Rep. mode by pressing the following keys in this order.

Stop key ➡ 0 ➡ Stop key ➡ 1

2. Enter the Factory Setting mode by pressing the following keys in this order.

Stop key ➡ Start key

3. Select the particular Factory Setting function to be set.
4. Make the necessary settings by following the instructions given sequentially on the screen.

NOTE: The function selected is highlighted.

<Exiting the Mode>

- Press the Panel Reset key on the control panel.